




ATC 用ジャコブステーパ－ホルダー (JTA)

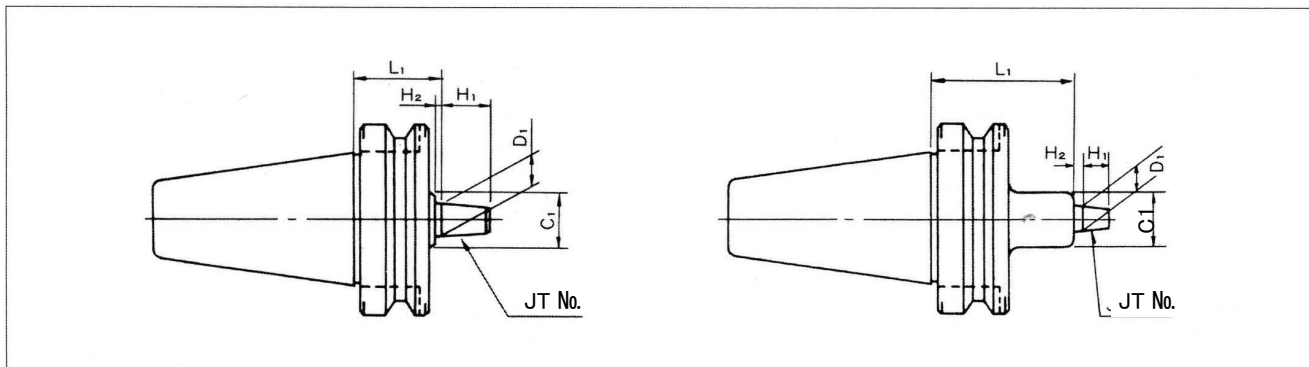

CODE	FIG.	JT No.	L	D1	C1	H1	H2	質量 kg
BT40-JTA1- 45	1	1	45	9.754	30	15	3	1.5
- 90	2		90					1.8
2S- 45	1	2S	45	13.94		18	4	1.5
- 90	2		90					1.8
2- 45	1	2	45	14.199		20	4	1.5
- 90	2		90					1.8
33- 45	1	33	45	15.85	24	4	1.5	
- 90	2		90				1.8	
6- 45	1	6	45	17.17	24	4	1.5	
- 90	2		90				1.8	
3- 45	1	3	45	20.599	35	28	1.5	
- 90	2		90				1.8	
BT45-JTA1- 45	1	1	45	9.754	30	15	3	2.2
- 90	2		90					2.5
2S- 45	1	2S	45	13.94		18	4	2.2
- 90	2		90					2.5
2- 45	1	2	45	14.199		20	4	2.2
- 90	2		90					2.5
33- 45	1	33	45	15.85	24	4	2.2	
- 90	2		90				2.5	
6- 45	1	6	45	17.17	24	4	2.2	
- 90	2		90				2.5	
3- 45	1	3	45	20.599	-	28	7	2.3
- 90	2		90		35		5	2.7
BT50-JTA1- 45	1	1	45	9.754	30	15	3	4.0
-105	2		105					4.2
2S- 45	1	2S	45	13.94		18	4	4.0
-105	2		105					4.2
2- 45	1	2	45	14.199		20	4	4.0
-105	2		105					4.2
33- 45	1	33	45	15.85	24	4	4.0	
-105	2		105				4.2	
6- 45	1	6	45	17.17	24	4	4.0	
-105	2		105				4.2	
3- 45	1	3	45	20.599	-	28	7	4.0
-105	2		105		35		5	4.2

※ドリルチャックを装着しストレートドリルその他を使用する。