



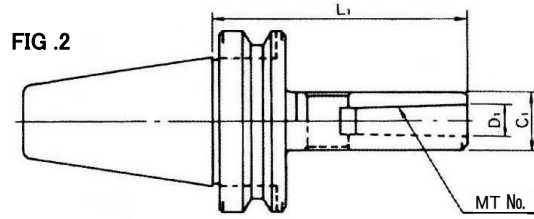

ATC用モールステーパーパーホルダー A型 (MTA)

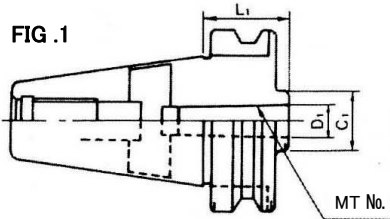

| CODE | FIG. | MT No. | L1 | D1 | C1 | 質量 kg | |
|-----------------|------|--------|-----|--------|--------|----------|--------|
| BT40-MTA1- 45 | 1 | 1 | 45 | 12.065 | 25 | 1.0 | |
| -MTA1-120 | 2 | | 120 | | | 1.3 | |
| -MTA1-180 | | | 180 | | | 1.6 | |
| BT40-MTA2- 45 | 1 | 2 | 45 | 17.78 | 32 | 1.0 | |
| -MTA2-120 | 2 | | 120 | | | 1.6 | |
| -MTA2-180 | | | 180 | | | 2.0 | |
| BT40-MTA3- 75 | 1 | 3 | 75 | 23.825 | 40 | 1.0 | |
| -MTA3-135 | 2 | | 135 | | | 1.7 | |
| -MTA3-180 | | | 180 | | | 2.2 | |
| BT40-MTA4- 90 | 1 | 4 | 90 | 31.267 | 50 | 1.1 | |
| -MTA4-165 | 2 | | 165 | | | 2.6 | |
| BT40-MTA5-195 | | | 195 | | | 2.1 | |
| ※ BT45-MTA1- 45 | 1 | 1 | 45 | 12.065 | 25 | 1.6 | |
| ※ -MTA1-120 | 2 | | 120 | | | 1.9 | |
| ※ BT45-MTA2- 45 | 1 | | 2 | | | 45 | 17.78 |
| ※ -MTA2-135 | 2 | 135 | | 2.1 | | | |
| ※ BT45-MTA3- 45 | 1 | 3 | | 45 | 23.825 | 40 | |
| ※ -MTA3-150 | 2 | | 150 | 2.4 | | | |
| ※ BT45-MTA4- 90 | 1 | | 4 | 90 | | | 31.267 |
| ※ -MTA4-180 | 2 | 180 | | 2.8 | | | |
| ※ BT45-MTA5-120 | 1 | 120 | | 3.5 | | | |
| BT50-MTA1- 45 | 1 | 1 | 45 | 12.065 | 25 | 3.9 | |
| -MTA1-120 | 2 | | 120 | | | 4.2 | |
| -MTA1-180 | | | 180 | | | 4.3 | |
| -MTA1-200 | | | 200 | | | 4.2 | |
| -MTA1-250 | | | 250 | | | 4.4 | |
| -MTA1-300 | | | 300 | | | 4.5 | |
| -MTA1-350 | 350 | 4.7 | | | | | |
| BT50-MTA2- 45 | 1 | 2 | 45 | 17.78 | 32 | 3.6 | |
| -MTA2-105 | 2 | | 105 | | | 3.7 | |
| -MTA2-135 | | | 135 | | | 4.3 | |
| -MTA2-180 | | | 180 | | | 4.6 | |
| -MTA2-200 | | | 200 | | | 4.5 | |
| -MTA2-250 | | | 250 | | | 5.0 | |
| -MTA2-300 | 300 | 5.5 | | | | | |
| -MTA2-350 | 350 | 6.0 | | | | | |
| BT50-MTA3- 45 | 1 | 3 | 45 | 23.825 | 40 | 3.8 | |
| -MTA3- 75 | | | 75 | | | 3.6 | |
| -MTA3-105 | | | 105 | | | 3.8 | |
| -MTA3-135 | | | 135 | | | 4.1 | |
| -MTA3-150 | | | 2 | | | 150 | 4.6 |
| -MTA3-180 | | | | | | 180 | 4.9 |
| -MTA3-200 | 200 | 5.0 | | | | | |
| -MTA3-250 | 250 | 5.5 | | | | | |
| -MTA3-300 | 300 | 6.0 | | | | | |
| -MTA3-350 | 350 | 6.5 | | | | | |
| BT50-MTA4- 75 | 1 | 4 | 75 | 31.267 | 50 | 3.7 | |
| -MTA4-105 | 2 | | 105 | | | 3.9 | |
| -MTA4-180 | | | 180 | | | 5.4 | |
| -MTA4-200 | | | 200 | | | 6.5 | |
| -MTA4-250 | | | 250 | | | 7.0 | |
| -MTA4-300 | | | 300 | | | 7.5 | |
| -MTA4-350 | 350 | 8.0 | | | | | |
| BT50-MTA5-105 | 1 | 5 | 105 | 44.399 | 65 | 4.5 | |
| -MTA5-180 | 2 | | 180 | | | 5.6 | |
| -MTA5-210 | | | 210 | | | 7.2 | |
| -MTA5-250 | | | 250 | | | 8.0 | |
| -MTA5-300 | 300 | 9.5 | | | | | |
| BT50-MTA6-278 | | 6 | 278 | 63.348 | 84 | 9.5 | |