




ATC 用シェルエンドミルアーバー (SMA)※

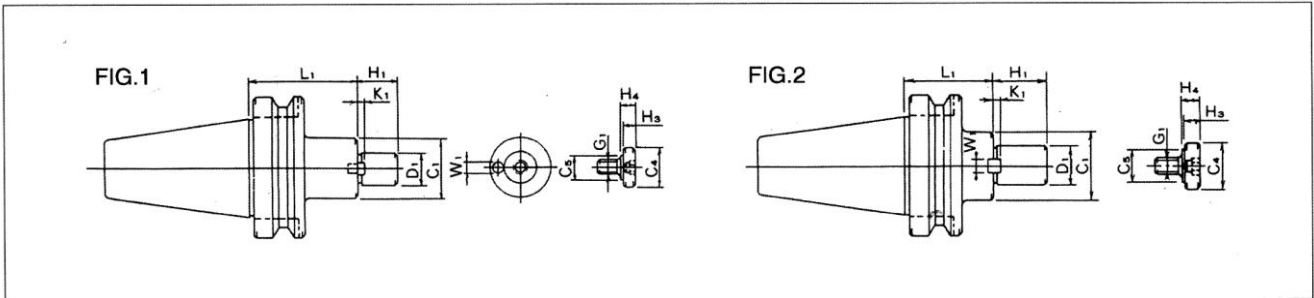

(インチサイズ)

CODE	FIG.	D1	L1	C1	C2	C3	H1	H2	W1	K1	G1	C4	C5	H3	H4	質量 kg			
BT40-SMA15.875-60	2	15.875	60	34	34	-	17	-	-	3	M 8	20	15	7	9	1.7			
-SMA15.875-120			120													2.1			
BT40-SMA22.225-45		22.225	45	42	42		-			27	-	8	3.5	M10	28	18	9	11	1.2
※ -SMA22.225-60			60																1.8
-SMA22.225-120			120																2.4
-SMA22.225-180			180																3.0
BT40-SMA25.4-45		25.4	45	50	50	-	36	-	-	4	M12	33	-	-	12	1.7			
※ -SMA25.4-60			60													2.0			
-SMA25.4-105			105													2.7			
-SMA25.4-150			150													3.6			
BT40-SMA31.75-45		4	31.75	45	60	60	24	38	6	-	4.5	M16	40	-	-	16	1.9		
※ -SMA31.75-60				60													2.3		
-SMA31.75-90	90			3.0															
BT40-SMA38.1-60	4	38.1	60	80	-	28	-	-	12	5	M20	50	27	14	20	2.9			
-SMA38.1-90			90													3.8			
BT50-SMA15.875-75	2	15.875	75	34	34	-	17	-	-	3	M 8	20	15	7	9	4.2			
-SMA15.875-120			120													5.8			
BT50-SMA22.225-75		22.225	75	42	42		-			27	-	8	3.5	M10	28	18	9	11	4.3
-SMA22.225-120			120																4.8
-SMA22.225-180			180																5.5
BT50-SMA25.4-60	3	25.4	60	50	60		-			36	-	-	4	M12	33	-	-	12	4.3
-SMA25.4-105			105			5.2													
-SMA25.4-150			150			5.8													
BT50-SMA31.75-45	4	31.75	45	60	70	24	38	6	-	4.5	M16	40	-	-	16	4.2			
※ -SMA31.75-75	75		5.2																
-SMA31.75-105	105		6.2																
BT50-SMA38.1-45	4	38.1	45	80	-	28	-	-	12	5	M20	50	27	14	20	4.3			
-SMA38.1-75			75													5.5			