


# ATC 用シェルエンドミルアーバー (SMB) ※

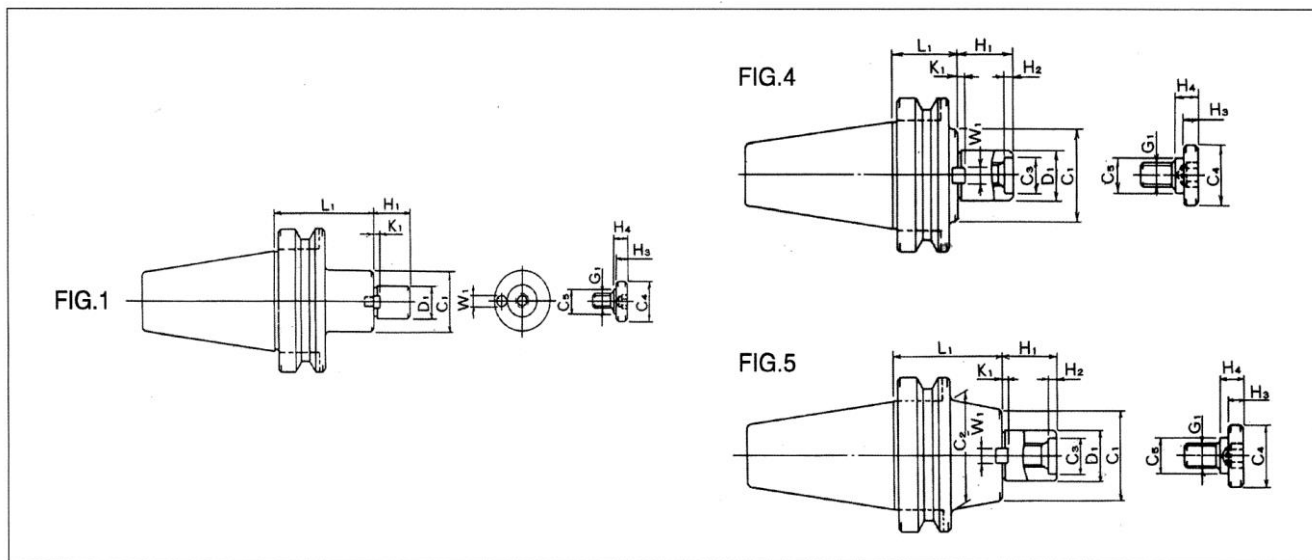

CODE	FIG.	D1	L1	C1	C2	C3	H1	H2	W1	K1	G1	C4	C5	H3	H4	質量 kg
BT40-SMB22.225-60	1	22.225	60	45	-	-	17	-	8	4	M10	28	18	9	11	2.4
-SMB22.225-120			120													2.9
-SMB22.225-180			180													3.4
BT40-SMB31.75-45	4	31.75	45	60	-	24	30	6	12.7	7	M16	40	23	10	16	2.2
-SMB31.75-60			60													2.7
-SMB31.75-105			105													4.1
BT40-SMB38.1-60	4	38.1	60	80	-	28	36	-	15.9	9	M20	50	27	14	20	2.8
-SMB38.1-90			90													3.7
BT50-SMB22.225-60	1	22.225	60	45	-	-	17	-	8	3.5	M10	28	18	9	11	4.3
-SMB22.225-120			120													5.0
-SMB22.225-180			180													5.7
BT50-SMB31.75-45	4	31.75	45	60	70	24	30	6	12.7	4.5	M16	40	23	10	16	4.2
-SMB31.75-75	5		75													5.2
-SMB31.75-105	105		6.2													
BT50-SMB38.1-45	4	38.1	45	80	-	28	36	-	15.9	5	M20	50	27	14	20	4.3
-SMB38.1-75			75													5.5

超硬ロー付シェルエンドミル用。